


Catalogue 2015 - ref: 2015-1

Potable Water Delivery

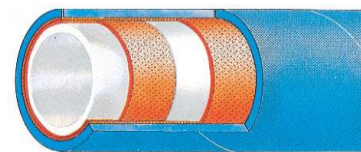

REF	DESIGNATION	Nominal		Diamètre en mm			Pression en bar		Aspiration en bar	Rayon min. de courbure en mm	Poids en kg/m	L mini m
		mm	pouce	Intérieur	Renfort	Extérieur	Service	Eclat.				
	POTABLE WATER DELIVERY 19	19	3/4"	19,0		30,0	10	30		190	0,634	40-46-61
	POTABLE WATER DELIVERY 25	25	1"	25,4		37,0	10	30		254	0,820	40-46-61
	POTABLE WATER DELIVERY 32	32	1 1/4"	32,0		44,0	10	30		320	1,080	40-46-61
	POTABLE WATER DELIVERY 38	38	1 1/2"	38,0		51,0	10	30		380	1,365	40-46-61
	POTABLE WATER DELIVERY 44	44	1 3/4"	44,5		57,5	10	30		445	1,565	40-46-61
	POTABLE WATER DELIVERY 50	50	2"	50,8		65,0	10	30		510	1,910	40-46-61
	POTABLE WATER DELIVERY 63	63	2 1/2"	63,5		77,5	10	30		635	2,330	40-46-61
	POTABLE WATER DELIVERY 38	76	3"	76,2		92,0	10	30		762	3,030	40-46-61
	POTABLE WATER DELIVERY 44	101	4"	101,6		117,5	10	30		1016	3,955	40-46-61

Données à titre indicatif, sous réserve de modifications sans préavis du fabricant



STRUCTURE:

Tube intérieur: Caoutchouc synthétique spécial, blanc, non toxique, qualité alimentaire, anti odeur et ne transmettant pas de gout.

Renfort: Insertion textile haute tenacité.

Tube extérieur: Caoutchouc synthétique spécial, résistant à l'abrasion, à l'ozone et aux agents atmosphériques.

APPLICATIONS:

Pour refoulement d'eau potable.

TEMPERATURE D'EMPLOI:

de - 40° C à + 70° C

NORMES:

ISO 1307 MEETS FDA AND EUROPEAN REQUIREMENTS

SANIFICATION:

120° C max. pendant 15 min. avec vapeur 50° C max. pendant 15 min. avec soude caustique (5%).

COULEURS:



STRUCTURE:

Tube: White non toxic, food quality, taste and odour free, special synthetic rubber.

Reinforcement : High tensile synthetic textile.

Cover: Abrasion, ozone and weather resistant, special synthetic rubber.

APPLICATIONS:

For discharge of potable water.

TEMPERATURE:

de - 40° F à + 158° F

NORMS:

ISO 1307 MEETS FDA AND EUROPEAN REQUIREMENTS

SANIFICATION:

Max. 120° C for 15 min. with steam, max. 50° C for 15 min. with caustic soda (5%).